



Delta

WATER SOFTENERS



ONTARIO PLUS TWIN TANK



-Total Non-Electric operation giving the home soft, dechlorinated water 24 Hours a day, everyday

-Easy to set Hardness Regulator, and an Automatic hard water blending feature if needed.

-The Ontario+ offers a down flow service. Carbon tanks on the top, resin tanks on the bottom allowing for ease of service when needed.

-Hi-Tech metering of the valves. Units are capable of metering very low flow rates. The units are capable of metering Reverse Osmosis flow rates.

-On each valve the meter offers view ports to determine meter performance and operation.

-High in service flow rates at 16 GPM.

-Counter current Regeneration. Total regeneration is completed using Soft Water.

GREEN






ONTARIO+

DUPLEX

WATER SOFTENER

Dimensions

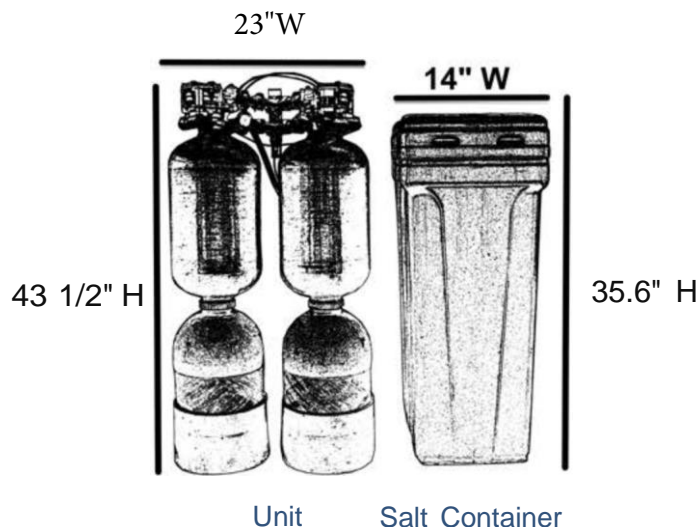

TECHNICAL DATA

| | |
|--------------------------------|------------------|
| Connection | 3/4" or 1" |
| Volume of resin | 0.42 cu ft. |
| Working Pressure | 15 - 115 psi* |
| Flow Rate (Δp 15 psi) | 16gpm (mixing=0) |
| Exchange Capacity | 11,200 grains 2X |
| Water Usage / Regeneration | < 25 gallon 2X |
| Salt Usage / Regeneration | 2.6 lb 2X |
| Regeneration Time | 32 min. |
| Max. Temperature | 104°F |

* for a correct regeneration, Delta Softeners require a minimum outlet pressure of 11.6 psi

DELTA WATER SYSTEMS USA
340 STRASBURG PIKE
LANCASTER, PA 17602

844-DELTAWS(844-335-8297)
www.deltawatersystemsusa.com

PA071323

